
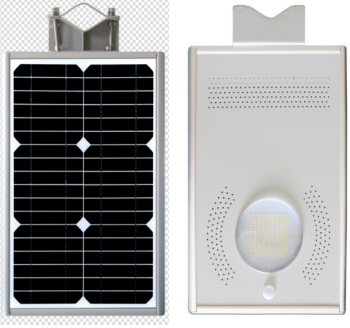

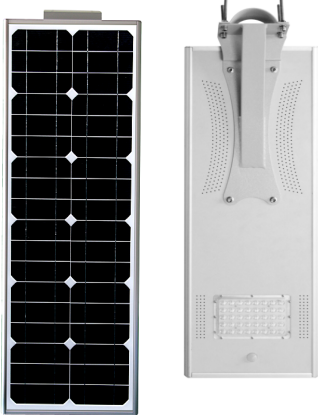




INNOSOLAR lamparas solares

Product Pictures	Model No.	Main Parameter	
	LC-SL-8W-001A	Material: aluminium	Condition Temperature: -20-50°C
		LED Qty: 40pcs SMD2835	Work Humidity: >95%
		Power: 8W	Colour rendering index: 80Ra
		Input Voltage: DC12V	Controller efficiency: ≥0.90
		Control: 20W	Lens angle: 60°*120°
		Batteries: 6AH	Work time: 0-12H
		Panel: 18V/20W	Waterproof: IP65
		Short Current: <5mA	GW: 5.4kg NW:4.6kg
		lighting effect:100LM/W	spec.: 505*295*70mm
		Luminous Flux (lm):800lm	package size: 570*350*135mm
Consecutive days: 3天			
	LC-SL-12W-002A	Material: aluminium	Condition Temperature: -20-50°C
		LED Qty: 60pcs SMD2835	Work Humidity: >95%
		Power: 12W	Colour rendering index: 80Ra
		Input Voltage: DC12V	Controller efficiency: ≥0.90
		Control: 20W	Lens angle: 60°*120°
		Batteries: 9AH	Work time: 0-12H
		Panel: 18V/20W	Waterproof: IP65
		Short Current: <5mA	GW: 5.8kg NW:4.8kg
		lighting effect:100LM/W	spec.: 505*295*70mm
		Luminous Flux (lm): 1200lm	package size: 570*350*135mm
Consecutive days: 3天			
	LC-SL-15W-003A	Material: aluminium	Condition Temperature: -20-50°C
		LED Qty: 80pcs SMD2835	Work Humidity: >95%
		Power: 15W	Colour rendering index: 80Ra
		Input Voltage: DC12V	Controller efficiency: ≥0.90
		Control: 20W	Lens angle: 60°*120°
		Batteries: 12AH	Work time: 0-12H
		Panel: 18V/30WP	Waterproof: IP65
		Short Current: <5mA	GW: 8.9kg NW:6.9kg
		lighting effect:100LM/W	spec.: 780*325*145mm
		Luminous Flux (lm): 1500lm	package size: 800*350*210mm
Consecutive days: 3 DAYS			
	LC-SL-20W-005A	Material: aluminium	Condition Temperature: -20-50°C
		LED Qty:20pcs 1W	Work Humidity: >95%
		Power: 20W	Colour rendering index: 80Ra
		Input Voltage: DC12V	Controller efficiency: ≥0.90
		Control: 40W	Lens angle: 60°*120°
		Batteries: 16AH	Work time: 0-12H
		Panel: 18V/40W	Waterproof: IP65
		Short Current: <5mA	GW: 10.6KG NW:9.5KG
		lighting effect:110LM/W	spec.: 920*325*145mm
		Luminous Flux (lm): 2200lm	package size: 960*350*210mm
Consecutive days: 3 DAYS			




Integrated
Solar Street
Light,LC-T003-
30W

Power : 30W
Input Voltage : DC24V
Batteries : 30AH
Panel : 18V/50W
lighting effect:155LM/W
Consecutive days : 3 DAYS
Lens angle : 80*150°
Work time : 0-12H
Waterproof: IP65
Size : 663*376mm
Induction device: microwave radar



LC-SL-
30W-
007A

Material: aluminium	Condition Temperature: -20-50℃
LED Qty:40pcs 1W	Work Humidity: >95%
Power: 30W	Colour rendering index: 80Ra
Input Voltage: DC12V	Controller efficiency: ≥0.90
Control: 40W	Lens angle: 60*120°
Batteries: 20AH	Work time: 0-12H
Panel: 18V/50W	Waterproof: IP65
Short Current: <5mA	GW: 14.2KG NW:12.5KG
lighting effect:120LM/W	spec.: 1136*325*145mm
Luminous Flux (lm):3600lm	package size: 1190*360*220mm
Consecutive days: 3 DAYS	

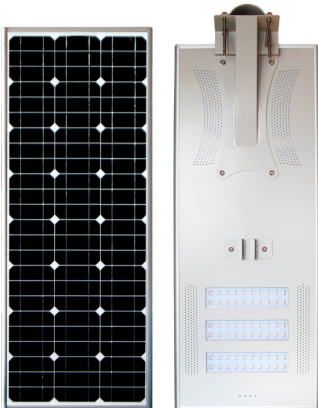

LC-SL-
40W-
009A

Material: aluminium	Condition Temperature: -20-50℃
LED Qty: 60pcs 1w	Work Humidity: >95%
Power: 40W	Colour rendering index: 80Ra
Input Voltage: DC12V	Controller efficiency: ≥0.90
Control: 40W	Lens angle: 60*120°
Batteries: 32AH	Work time: 0-12H
Panel: 36V/70W	Waterproof: IP65
Short Current: <5mA	GW: 19.2KG NW:16.7KG
lighting effect:130LM/W	spec.: 1136*420*45mm
Luminous Flux (lm):5200lm	package size: 1190*490*220mm
Consecutive days: 3 DAYS	



LC-SL-
50W-
010A

Material: aluminium	Condition Temperature: -20-50℃
LED Qty: 80pcs 1W	Work Humidity: >95%
Power: 50W	Colour rendering index: 80Ra
Input Voltage: DC12V	Controller efficiency: ≥0.90
Control: 50W	Lens angle: 60*120°
Batteries: 42AH	Work time: 0-12H
Panel: 33V/95W	Waterproof: IP65
Short Current: <5mA	GW: 32KG NW:28.KG
lighting effect:130LM/W	spec.: 1469*420*395mm
Luminous Flux (lm):6500lm	package size: 1635*485*165mm (Lantern)
Consecutive days: 3 DAYS	package size: 710*420*310mm(Base)



LC-SL-

Material: aluminium	Condition Temperature: -20-50℃
LED Qty: 80pcs 1w	Work Humidity: >95%
Power: 60W	Colour rendering index: 80Ra
Input Voltage: DC12V	Controller efficiency: ≥0.90
Control: 60W	Lens angle: 60*120°



60W-010A

Batteries: 48AH	Work time: 0-12H
Panel: 33V/95W	Waterproof: IP65
Short Current: <5mA	GW : 33.8KG NW:29.5KG
lighting effect:130LM/W	spec.: 1469*420*395mm
Luminous Flux (lm):7800lm	package size- 1635*485*165mm (Lantern)
Consecutive days: 3 DAYS	package size: 710*420*310mm(Base)



Integrated Solar Street Light,LC-T003-80W

Power : 80W Input Voltage : DC24V Batteries : 50AH Panel : 18V/120W lighting effect:150LM/W Luminous Flux (lm):15000lm Consecutive days : 3 DAYS Lens angle : 60*120° Work time : 0-12H Waterproof: IP65 Size : 1460*398mm Induction device: microwave radar	
---	--